


Operator's Manual



Model Number: 420-0015

Model Description:41" 19-Drawer Stainless Steel Rolling Tool Chest

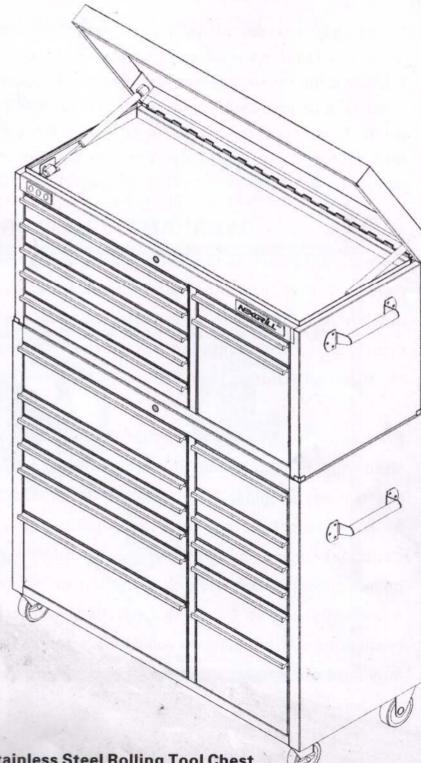

6 YEARS LIMITED WARRANTY

Our obligation under this warranty is limited to repair or replacement at, our option, of the product during the warranty period. The extent of any liability of Nexgrill. under the warraty is limited to repair or replacement. This warranty does not cover normal wear of parts, damage resulting from any of the following: negligent use or misuse of the product, use contrary to operating instructions, or alteration by any person other than our factory service center. The warranty period is not extended by such repair or replacement.

WARRANTY CLAIM PROCEDURE:

If you require service or parts for your tool chest, please contact our Warranty Service Center for factory direct assistance. Our hours are 8 AM to 5 PM PST.Our number is 1–800–648–5864 and our FAX number is 1-905-671-4604. Please direct all correspondence to: Target Wholesale, 1075 Britannia Road East Mississauga, Ontario L4W, 3X1 ATTN: Warranty Service Center.

Product repair as provided under this warranty is your exclusive remedy. Nexgrill. shall not be liable for any incidental or consequential damages for breach of any express or implied warranty on its products. Except to the extent prohibited by applicable law, any implied warranty or merchantability or fitness for a particular purpose on this product to the duration of the above warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state.



ROLLING TOOL CHEST ASSEMBLY INSTRUCTIONS

CAUTION

TAKE SAFETY PRECAUTIONS WHEN USING YOUR TOOL CHEST

- *Do not open more than one drawer at a time.
- *Set the brake on the locking caster unless you are moving the tool chest.
- *Lock drawers and lid before moving the chest.
- *Do not step on drawers.
- *Do not let children near the tool chest.

To keep your NEXGRILL Tool Chest looking great, polish with a high quality Stainless Steel cleaner. Use a soft, lint–free cloth and wipe with the grain of the finish.






ROLLING TOOL CHEST ASSEMBLY INSTRUCTIONS

"Assemble the handles first to make it easier to move the tool chest"

FIRST STEP

TO INSTALL HANDLES


Simply position the handles over the holes and attach with the carriage botls provided. Tighten securely.

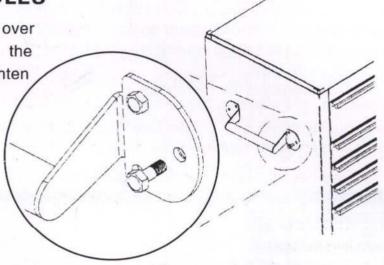

SECOND STEP TO INSTALL CASTERS

Carefully lay bottom cabinet on its back. Position the two locking casters on either the left or right side of the bottom of the cabinet.

Insert the carriage bolts through washers, then through the casters and into the bottom of the cabinet. Tighten securely. Repeat for the two freewheeling casters on the other side of the cabinet.

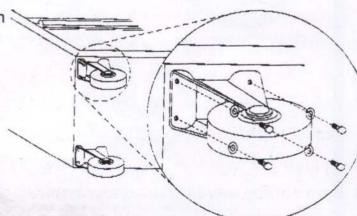




ROLLING TOOL CHEST ASSEMBLY INSTRUCTIONS

TO REMOVE AND REPLACE DRAWERS

PUSH DOWN (RIGHT HAND SIDE)

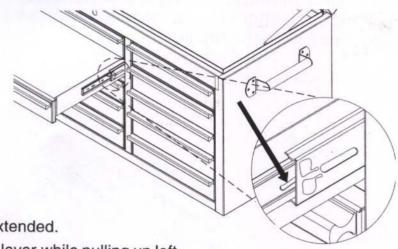


TO REMOVE DRAWER:

Pull drawer out so it is almost fully extended.

Push down right hand black release lever, while pulling up left hand black release lever.

While holding the levers in the positions as instructed above, pull the drawer outward until it is released from the drawer slide.

PULL UP (LEFT HAND SIDE)

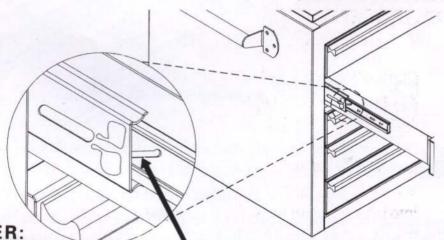

TO REPLACE DRAWER:

Extend the drawer slides from the tool chest.

Insert the brackets on each side of the drawer into the slots in the cabinet slides, being careful that they are properly positioned.

Once properly inserted, completely close the drawer to set the slides in their proper positions.




ROLLING TOOL CHEST ASSEMBLY PARTS LIST

"The keys are taped to the corrugated packing material on the top of the chest which you should have seen as soon as you removed the top lid."

DESCRIPTION

- 1 HANDLE
- **2** 6 HYDRAULIC LIFT
- 8 SLIDE
- 4 DRAWER PULL HANDLE (R)
- 3 DRAWER PULL HANDLE (L)

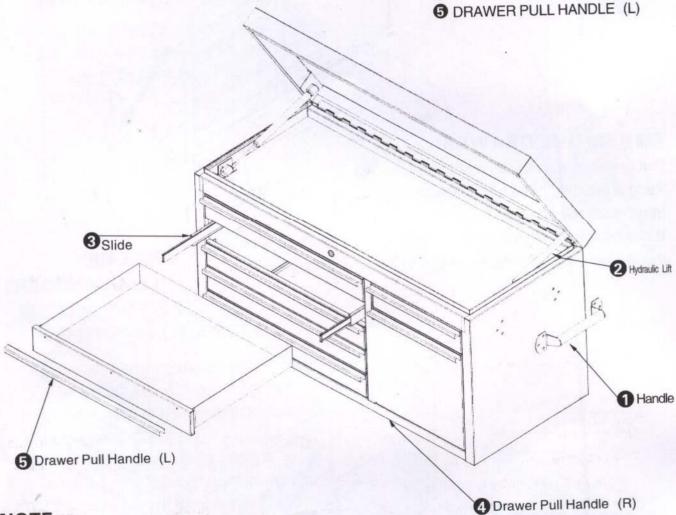

NOTE:

- Replacement keys may be ordered using the code which appears on the face of the lock.
- 2 Rotate the key to 90° position when you open or lock up the Top Cover.
- 3 Make sure the Top Cover was opened completely (that is to say, the 6 Hydraulic Lift is on its longest position) before you pull out any one drawer on the top .
- Make sure all the top drawers are pushed in completely before you close the Top Cover.



ROLLING TOOL CHEST PARTS LIST

DESCRIPTION:

OHANDLE 25"SWIVEL CASTER @5"SWIVEL CASTER WITH BRAKE **ODRAWER PULL HANDLE (R)** GDRAWER PULL HANDLE (L) **G**SLIDE 6 Slide 25" Swivel Caste Handle Drawer Pull Handle (L)

NOTE:

• Replacement keys may be ordered using the code which appears on the face of the lock.

4 Drawer Pull Handle (R)

3 5"Swivel Caster With Brake

- 2 Rotate the relevant key to 180° position when you open or lock up any drawers. Please kindly note one key on one side is worked for all the drawers on this side.
- 3 Make sure all the drawers on the same side are pushed in completely before you lock up the lock on this side. Unless the drawers will be damaged and can not be locked.

DEAR CUSTOMER:

Now, your Tool Chest is ready to use. Please kindly put the PU cushion into the relevant drawers, one piece for one drawer.